Towards Automated Document Revision: Grammatical Error Correction, Fluency Edits, and Beyond

Masato Mita¹ Keisuke Sakaguchi² Masato Hagiwara^{3,4} Tomoya Mizumoto¹ Jun Suzuki^{5,1} Kentaro Inui^{5,1} ¹RIKEN ²Allen Institute for AI ³Earth Species Project

⁴Octanove Labs ⁵Tohoku University

Abstract

Natural language processing technology has rapidly improved automated grammatical error correction tasks, and the community begins to explore document-level revision as one of the next challenges. To go beyond sentencelevel automated grammatical error correction to NLP-based document-level revision assistant, there are two major obstacles: (1) there are few public corpora with document-level revisions being annotated by professional editors, and (2) it is not feasible to elicit all possible references and evaluate the quality of revision with such references because there are infinite possibilities of revision. This paper tackles these challenges. First, we introduce a new document-revision corpus, TETRA, where professional editors revised academic papers sampled from the ACL anthology which contain few trivial grammatical errors that enable us to focus more on document- and paragraphlevel edits such as coherence and consistency. Second, we explore reference-less and interpretable methods for meta-evaluation that can detect quality improvements by document revision. We show the uniqueness of TETRA compared with existing document revision corpora and demonstrate that a fine-tuned pre-trained language model can discriminate the quality of documents after revision even when the difference is subtle. This promising result will encourage the community to further explore automated document revision models and metrics in future.

Document revision is a crucial process in essay and argumentative writing. According to previous research on argumentative writing (Flower and Hayes, 1981; Beason, 1993; Buchman et al., 2000; Seow, 2002; Allal et al., 2004), a typical writing process consists of three stages; *revising* is the initial editing step to plan and build the overall structure of the document at a high level, *editing* focuses more on sentence- or phrase-level expressions, and *proofreading* checks the details such as spelling and grammatical errors (Figure 1, left). Although the order of the steps are not strictly determined, the typical writing process starts from a broad and high-level perspective and then narrow down the scope of edits.

Contrary to the typical human writing process, automated grammatical error correction (GEC) research in NLP initially focused on a fine-grained scope such as spelling errors (Brill and Moore, 2000; Toutanova and Moore, 2002; Islam and Inkpen, 2009), closed-class parts-of-speech such as prepositions and determiners (Han et al., 2006; Nagata et al., 2006; Felice and Pulman, 2008). Later the research community expanded its scope to phrase- and sentence-level edits with fluency being considered (Sakaguchi et al., 2016; Napoles et al., 2017) (Figure 1, right). However, much less work has been done on *document-level* revision because of two major challenges. First, document revisions have a broader scope (e.g., coherence and flow) than conventional GEC and fluency correction, and thus there are few publicly available corpora that have such annotations by experts (professional editors). Second, it is challenging to evaluate the quality of revisions based on a limited number of references because there are numerous ways to revise a single document. This indicates that reference-less evaluation metrics (Napoles et al., 2016b; Choshen and Abend, 2018; Islam and Magnani, 2021) will be suitable for assessing automated document revision models.

We tackle these challenges toward a automated *document* revision, introducing a new corpus (§3) and exploring possibilities for transparent evaluation methods which do not depend on gold references (§4). Our new corpus, **Text Revision** of **A**CL papers (TETRA)¹, consists of document-level revisions for the articles published at ACL-related venues, and is designed based on an annotation scheme that can handle edit types beyond sentences

¹https://github.com/chemicaltree/tetra

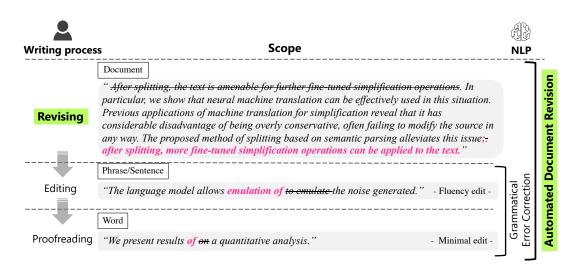


Figure 1: Overview of the scope for automated document revision. Each example is taken from TETRA corpus. We focus document revision process which has been overlooked by grammatical error correction (GEC). Automated document revision extends the scope of GEC.

(such as argument flow) in addition to conventional word- and phrase-level edit types. We show that TETRA has advantages over existing corpora for document revision (Lee and Webster, 2012; Zhang et al., 2017; Kashefi et al., 2022). We then present a simple (meta-)evaluation method, instance-based revision classification (IRC), which measures and compares the performance of evaluation metric candidates based on their accuracy for classifying which one of the given pair of snippets is a revised one. The accuracy for IRC is calculated per each edit type, which provides us transparent and interpretable analyses for better designing evaluation metrics in future. We note that our contribution in this paper is not to propose a specific model or metric for automated document revision but rather present a meta-evaluation method to help measuring improvements of such models and metrics that our community will develop in future.

With the TETRA corpus and IRC, we conduct experiments to explore whether pre-trained language models can be a good baseline metric to discriminate the original and revised snippets. We compared BERT (Devlin et al., 2019) and GPT-2 (Radford et al., 2019) as baseline methods with and without fine-tuning. The results show that the supervised method is able to choose better snippets with an accuracy of 0.85 - 0.96, indicating the feasibility of evaluation for automated document revision.

We hope that TETRA and IRC encourage the community to further study automated document revision modeling and metrics beyond GEC and fluency edits.

1 Background

The field of grammatical error correction (GEC), which has a multi-decade history, started out with the goal of detecting and correcting targeted error types and providing feedback to ESL (English as a Second Language) learners.² Initial GEC systems focused only on a small number of closedclass error types such as articles (Han et al., 2006) and prepositions (Chodorow et al., 2007; Tetreault and Chodorow, 2008; Tetreault et al., 2010; Cahill et al., 2013; Nagata et al., 2014). The scope of GEC was later expanded to include errors of all types, not only closed-class words, but also verb forms, subject-verb agreement, and word choice errors (Lee and Seneff, 2008; Tajiri et al., 2012; Rozovskaya and Roth, 2014). This line of work resulted in establishing shared benchmark tasks (Dale and Kilgarriff, 2011; Dale et al., 2012; Ng et al., 2013, 2014).

The scope of GEC has been further expanded from word-level closed-class edits to phrase- and sentence-level *fluency* edits (Sakaguchi et al., 2016) motivated by the observation that error-coded local edits do not always make the result sound natural to native speakers. Along with this expansion, the community has proposed new benchmark datasets (Napoles et al., 2017; Bryant et al., 2019; Napoles et al., 2019; Flachs et al., 2020) and evaluation metrics (Dahlmeier and Ng, 2012; Felice

²In this paper, we focus on GEC research literature after 2000's when statistical methods began to be applied widely. For the full history of GEC in 80's and 90's such as rule-based approaches, please refer to Leacock et al. (2014).

and Briscoe, 2015; Napoles et al., 2015; Bryant et al., 2017; Napoles et al., 2019; Gotou et al., 2020) for sentence-to-sentence GEC, and also developed GEC models with deep neural network (DNN) approaches, finding that these models are robust against word- and phrase-level local edits in a given sentence and show human-parity performance in some benchmark datasets (Yuan and Briscoe, 2016; Ji et al., 2017; Chollampatt and Ng, 2018; Ge et al., 2018; Kiyono et al., 2019; Kaneko et al., 2020; Rothe et al., 2021). More recently, Yuan and Bryant (2021) extend DNN models by taking longer context (e.g., previous sentence) and show improvements on sentence-level error correction (e.g., correcting verb tense).

Contrary to the rapid progress of grammar and fluency correction, few research studies have investigated revisions for document-level argumentative writing, which requires more human effort to create corpora/datasets to start with. Lee and Webster (2012) is an initial attempt to build a documentrevision corpus, which consists of 13,000 student writings with feedback comments from TESOL (Teaching English to Speakers of Other Languages) program tutors. Although authors prepared labels for paragraph-level revisions (e.g., coherence), only 3% of the entire revisions are annotated as paragraph-level revisions while 90% are word-level and 7% are sentence-level. This is because the corpus consists of language learners' writing and the vast majority of errors are of simple grammar and fluency. This tells an important lesson—a corpus for document-level revision should be based on documents with grammatical and fluency edits already addressed to some extent. In addition, this corpus is not publicly available because of the copyright. We believe that the data source for a documentlevel corpus should be more accessible under an open license to encourage community-based open research in the future.

Another line of work (Zhang and Litman, 2014, 2015; Zhang et al., 2016, 2017; Kashefi et al., 2022) has built the ArgRewrite corpus, a collection of 86 argumentative essays each of which consists of three drafts (two cycles of revisions) with edit type labels. In ArgRewrite corpus (both v1 and v2), nearly half of the entire edits is annotated as surface-level correction (i.e., conventional GEC or fluency edits) and the other half is annotated as content-level document revision. ArgRewrite corpus has advantages over Lee and Webster (2012)

in terms of the amount of document-level revision, but all essays are written on the same single topic. The topic for the first version (Zhang et al., 2017) is about arguing *whether the proliferation of electronic enriches or hinders the development of interpersonal relationships*, and the later version (Kashefi et al., 2022) is about arguing *support or against self-driving cars*. This limitation of topic diversity would cause an overfitting (Mita et al., 2019), when it comes to developing and evaluating automated document revision models.

2 Automated Document Revision

We formalize the automated document revision task as follows. Given a source document d that consists of paragraphs, an (possibly automated) editor f revises d into d' ($f : d \mapsto d'$). The revision R is a set of edits e, and an edit e is defined as a tuple e = (src, tgt, t, c), where src is the source phrase before the revision, tgt is the revised phrase, t is the edit type (e.g., grammar, word choice, consistency), and c is (optional) rationale comments to the edit. When *src* is empty (\emptyset) , this edit indicates insertion, while it indicates deletion in the case when tgt is empty. Otherwise, the edit is regarded as substitution. Automated document revision includes various edit types (t) such as mechanics, word choice, conciseness, and coherence. More details are discussed in $\S3.4$. We emphasize that tdoes not exclude the scope of conventional (sentential and subsentential) grammatical error and fluency correction. Rationale comments (c) are useful resource for feedback generation study which becomes prominent in the GEC community (Nagata, 2019; Hanawa et al., 2021; Nagata et al., 2021). Automated document revision is thus a natural extension of sentence-level error correction to documentlevel error correction with a wider context being considered. We will discuss the evaluation in §4.

3 The TETRA Corpus

3.1 Data Source

We use the ACL Anthology³ as the data source of TETRA for the following reasons. First, we focus on *document-level* revision rather than sentencelevel revision, and therefore we select documents that have as few grammatical errors (i.e., conventional scope of GEC) as possible. The ACL anthology consists of peer-reviewed papers on NLP,

³https://aclanthology.org

Aspects	Edit types (abr.)	Definition	Scope	%
Grammaticality	grammar, capitalization word choice, word order	edits that aimed to fix spelling/grammar mistakes	S	19.4
Fluency		edits that aimed to increase sentence fluency	S	23.7
Clarity	clarity	edits that aimed to amplify meaning for clarity	S/D	19.4
Style	style, tone	edits that aimed to adapt the style	S/D	8.0
Readability	readability	edits that aimed to improve readability	S/D	16.8
Redundancy	redundancy, conciseness	edits that aimed to reduce redundancy	S/D	7.2
Consistency	consistency, flow	edits that aimed to increase paragraph fluency	D	5.5

Table 1: Definition of edit types. S and D (in the *scope* column) indicate the sentence and document, respectively.We highlightedit typesthat relies on beyond sentence-level context to edit.

	Grammaticality	Fluency	Clarity	Style	Readability	Redundancy	Consistency
--	----------------	---------	---------	-------	-------------	------------	-------------

This paper presents empirical studies and closely corresponding theoretical models of a chart parser's performance while the performance of a chart parser exhaustively parsing the Penn Treebank with the Treebank's own context-free grammar (CFG)CFG grammar. We show how performance is dramatically affected by rule representation and tree transformations, but little by top-down vs. bottom-up strategies. We discuss grammatical saturation, provide an, including analysis of the strongly connected components of the phrasal nonterminals in the Treebank, and model how, as sentence length increases, regions of the grammar are unlocked, increasing the effective grammar rule size increases as regions of the grammar are unlocked, and yielding super-cubic observed time behavior in some configurations.

We expect this approach to yield the following three improvements. Taking advantage of the representation learned by the English model will lead to shorter training times compared to training from scratch. Relatedly, the model trained using transfer learning will require requires less data for an equivalent score than a German-only model. Finally, the more layers we freeze the fewer layers we will need to back-propagate through during training; thus,. Thus we expect to see a decrease in GPU memory usage since we do not have to maintain gradients for all layers.

We present the results off on a quantitative analysis of a number of publications in the NLP domain on the collectionpublishing, and availability of research data. We find that, although a wide range of publications rely on data crawled from the web, but few publications providegive details of on how potentially sensitive data was treated. In addition Additionally, we find that, while links to repositories of data are given, they often do not work, even a short time after publication. We present put together several suggestions on how to improve this situation based on publications from the NLP domain, as well as but also other research areas.

Table 2: Examples of revision. Each edit type is highlighted respectively.

and they are generally well written⁴. Second, the ACL anthology contains a diverse range of papers in terms of authors and venues such as conferences vs. workshops, students vs. non-students, native vs. non-native speakers of English, as shown in Bergsma et al. (2012). Finally, the license and copyright of the ACL anthology are more flexible than existing datasets for similar purposes (Lee and Webster, 2012). We emphasize that a less restricted and widely accessible corpus would advance the research on automated document revision in the community.

We chose source documents from the ACL anthology as follows. First, we created $8 (=2^3)$ groups based on the possible combinations of three different attributes: (1) whether the paper is published at a conference vs a workshop, (2) whether the paper is affiliated with a native vs non-native English speaking country, and (3) whether the first author is a student or not. We randomly sampled papers until we have eight different papers per each group (i.e., 64 papers in total). For each paper, we extracted the title, the abstract, and the introduction as the source document (d) of TETRA.

3.2 Annotation Scheme

The scope and granularity of edit types has also a wide variety in previous work and there is no standard set of labels. Thus, we define edit type categories (Table 1) based on previous literature on the argumentative and discourse writing (Kneupper, 1978; Faigley and Witte, 1981; Burstein et al., 2003; Zhang et al., 2017). Table 2 shows concrete examples of each edit type in TETRA.

In terms of the format of the annotation, there are several annotation schemas used for documentlevel revision and grammatical error correction. For example, Dale and Kilgarriff (2011), Dale et al.

⁴In fact, one of the first shared tasks for grammatical error correction (Dale and Kilgarriff, 2011) used the ACL Anthology as the source data, although the scope of annotation is limited to closed-class grammatical errors such as prepositions and determiners.

	Lee and Webster (2012)	Zhang et al. (2017)	Kashefi et al. (2022)	Ours (TETRA)
# docs	3760	60	86	64
# references	1	1	1	3
% beyondGECs	3.2	49.4	52.6	56.9
Drafted by	ESL	ESL/Native	ESL/Native	ESL/Native
Revised by	Author	Author	Author	Experts
Feedback by	Non-experts	Experts	Experts	Experts
Topic diversity	\checkmark			\checkmark
Public availability		\checkmark	\checkmark	\checkmark

Table 3: Characteristics of TETRA corpus compared to existing document revision corpus. % beyondGECs shows the ratio of edits that are not covered by GEC edit types. *Drafted by* indicates who wrote the (first) draft, *Revised by* shows who revised the draft by whose feedback (*feedback by*). Topic diversity (\checkmark) presents whether the corpus contains two or more topics, or just single topic (no \checkmark). Public availability (\checkmark) shows whether the corpus is publicly available to the community.

(2012), and Yannakoudakis et al. (2011) adopt an XML format, Zhang et al. (2016) uses a simple table format, Berzak et al. (2016) uses a CoNLL format (Buchholz and Marsi, 2006), and Dahlmeier and Ng (2012) have created an M2 format which is a variant of the CoNLL format.

For creating TETRA, we choose an XML format for the following reasons. First, XML is easy to parse with standard libraries (e.g., Python Element-Tree, Java DOM parser)⁵ compared with the other formats that often require exclusive scripts. These exclusive scripts will cost more for the maintenance to keep up with the updates of additional dependency. Second, XML is more flexible than the other formats to embed additional information such as edit types, edit rationale, comments, and other meta information. Example of our XML annotation is shown in Appendix (Table 7).

3.3 Annotators

We recruited three professional editors who are native speakers of English and also have years of experience in editing and proofreading English academic writing. The editors independently revised all the 64 documents on Google Docs platform, adding edit rationale whenever appropriate. The revised documents are converted into the XML format by the first two authors.⁶

3.4 Statistical Analysis

The right-most column in Table 1 shows the distribution of edit types found in randomly sampled 16 papers (25% of TETRA corpus). We find that 56.9% of the edits are related to the scope beyond sentence-level context (e.g., redundancy), which is larger than the other document revision corpora (Table 3). This is simply because TETRA's source documents are academic papers which are already proofread to some extent, compared with other existing document revision corpora where language learner essays are used as the source. It is also important to note that paragraph-level revisions have longer range (i.e., more tokens in one edit) and thus have fewer numbers than word- and sentence-level edits in its nature. In terms of the difference according to three different attributes (\S 3.1), we did not find any clear patterns, indicating that the quality of papers in the ACL corpus is uniformly good across venues and author attributes. The details are shown in Appendix (Table 8).

In document-level revision, it is not straightforward to compute inter-annotator agreement because of the diversity of possible revisions and wide spans of edits. Thus, we measured two levels of interannotator agreements (1) agreement on detection and (2) agreement on *correction*. The first measurement computes how often edit spans overlap (i.e., agree) among annotators, and the second measurement computes how often edit labels match when two or more annotators detect the same (or overlapped) span. Table 4 shows the results. The agreement rate on *detection* is about 0.3, indicating the diversity of possible revisions, while the agreement on *correction* is about 0.8, which shows that edits are consistent among annotators when they correct the same (local) span.

4 IRC: Meta-evaluation Framework

Towards automated document revision, in addition to creating a corpus, it is essential to establish eval-

⁵We made the nest of XML tags as shallow as possible for users to parse documents even more easily. In TETRA, the maximum depth of nested XML tags is two.

⁶While converting, we also made minor corrections and remapping edit types only when it is necessary.

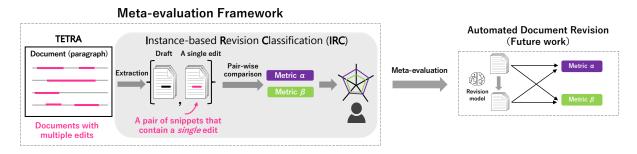


Figure 2: Overview of proposed meta-evaluation framework. We introduce document revision corpus (TETRA) and propose instance-based revision classification IRC to measure (i.e., meta-evaluate) the improvement of documents by the revision.

Levels	Avg	Min	Max
Detection	0.32	0.27	0.35
Correction	0.83	0.75	1.00

Table 4: Two levels of inter-annotator agreements: agreement on *detection* and *correction*. We find that annotators find out diverse possible revision while they make similar (or the same) revisions if they edit the same local span.

uation metrics that measures document's quality improvement (and possibly deterioration) by revision. However, it is not feasible to elicit all possible gold references because there are infinite ways of document revision. Moreover, it is difficult to automatically measure the quality of a revision based on an *absolute* metric because a single document contains a variety of edits based on many evaluation aspects (Table 1).

Thus, it is more straightforward to consider relative metric which, given a pair of documents, detects if one is an improved version of the other based on binary classification. Pairwise comparisons have been shown to be effective as a metaevaluation method in situations where absolute evaluation is difficult in previous studies (Guzmán et al., 2015; Christiano et al., 2017). However, in the document revision scenario, it is still challenging to perform make relative judgements because one lumps together a variety of edits and the binary value would not tell which of the edit(s) exactly contribute the improvement. In fact, there is a limit in the comprehensive evaluation, as the optimal metric varies depending on the evaluation aspects (Kasai et al., 2021a,b).

Addressing the above concerns, we propose instance-based revision classification (IRC), which can detect quality improvements by document re-

vision. In IRC, more concretely, given a pair of snippets that contain a *single* edit, we compare (reference-less) metrics according to the accuracy of binary prediction (i.e., which of the snippets is a revised one?). By focusing on comparing 'single edit' differences, we can obtain transparent and interpretable measures for each edit type (e.g., which edit type is more challenging to revise than the other types), which enables us to investigate better evaluation metrics in future. Figure 2 shows an overview of IRC framework.

5 Experiment

In this section, we demonstrate the utility of IRC framework by evaluating baseline metrics. Specifically, we compare BERT (Devlin et al., 2019) and GPT-2 (Radford et al., 2019) as supervised and unsupervised baseline metrics to see whether pre-trained language models can be a good baseline metric to discriminate the original and revised snippets. In addition, we investigate the current status and feasibility of automatic evaluation for document-level revisions.

5.1 Evaluation

To conduct meta-evaluation with IRC, we need to convert TETRA corpus into pairs of snippets that contain a single edit. Thus, we divided TETRA corpus into 3 (48 papers):1 (16 papers) for train set:test set in terms of paper units, and then converted the test data into pairs of snippets. If multiple edit type was assigned, each edit type was extracted independently as a snippet pair. Furthermore, the context width when extracted as snippets was in paragraphs, assuming a single paragraph to be a single document. Using the above procedure, we obtained 1,368 snippet pairs for evaluation.




Figure 3: Meta-evaluation result (Accuracy).

5.2 Baseline metrics

We employed the following two reference-less (unsupervised and supervised) metrics with pre-trained neural language models as baselines, using the Pytorch implementation of transformers (Wolf et al., 2020).

GPT-2 based metric (\mathbb{GPT} -2) It is an unsupervised evaluation metric using GPT-2 (Radford et al., 2019). This metric compares the per-word perplexity of each of the two input documents. It performs a binary prediction based on the hypothesis that if the per-word perplexity of the revised document is lower than that of the source document, the revised one is a good revision, and vice versa.

BERT based metric (\mathbb{BERT}) It is a supervised evaluation metric based on binary prediction using BERT (Devlin et al., 2019). For fine-tuning, we used the train split of TETRA (resulting in 868 document pairs) with half of the document pairs randomly swapped before and after revisions for creating negative examples (deterioration version) and fine-tuned on them as a binary classification problem task. The hyperparameters for the model training are shown in Appendix C (Table 9).

5.3 Results

As shown in Figure 3, our IRC framework enables us to evaluate the accuracy of each metrics in aspect-wise format and to focus on developing optimal evaluation metrics for each evaluation aspect while analyzing the strengths and weaknesses of them. We also find that the supervised metric (\mathbb{BERT}) is able to classify with 0.79 - 0.90 accuracy, indicating the supervised metric based on pretrained neural language models can be a good baseline metric to discriminate the original and revised snippets even when difference is subtle.

6 Analysis

6.1 Is IRC framework reliable?

The experiment in §5 has shown the utility of IRC framework, but its reliability is not clear. In other words, the following questions are naturally raised: *do improved accuracy metrics on* IRC *framework mean that they can more accurately determine whether a revision is good or bad?* For example, it remains possible that the supervised based metric (\mathbb{BERT}), trained on the binary classification of a source document and its revisions by the experts, is not judging whether the revision is good or bad but whether it is expert or not by finding expert-specific phrases and expressions.

To verify the above question and confirm the reliability of IRC framework, we evaluate the performance of the baseline metrics by introducing "worse-quality revisions" into TETRA by using corruption methods that artificially worsen the quality of the source documents. Suppose the performance of the metrics is significantly degraded by introducing the worse-quality revisions not included in the training data. In that case, it is more likely that the metrics do not judge whether a revision is good or bad but whether it is expert or not, and vice versa.

6.1.1 Corruption Methods

We employed the following two simple corruption methods.

Automatic Error Generation (AEG): It is a method to artificially generate grammatical errors for training data augmentation in GEC that has been actively studied in recent years. We used a back-translation model, the most commonly used in GEC among the AEGs (Xie et al., 2018; Kiyono et al., 2019; Koyama et al., 2021), with the motivation to generate worse-quality revisions mainly in terms of grammaticality and fluency. A reverse model, which generates an ungrammatical sentence from a given grammatical sentence, is trained in the back-translation model. As for building the reverse model, we followed the general settings in previous studies (Kiyono et al., 2019; Koyama et al., 2021). The detailed of experimental setting for our AEG model is shown in Appendix D

Test sets	BERT	GPT-2
TETRA { $source, gold$ }	0.85	0.57
worse only{ $source, worse$ }	0.96	0.81

Table 5: Evaluation results for reliability.

Outputs	ERRANT	GLEU
Source	0.0 (0.0)	70.6 (1.5)
Human experts	24.5 (5.7)	71.4 (1.0)

Table 6: Evaluation results with GEC's metrics.Values in parentheses indicate standard deviations.

Sentence Shuffling It is a simple corruption method that deteriorates the quality of a source document by randomly shuffling sentences. As illustrated in Figure 1, document revision involves reordering sentences in terms of *flow* and *consistency* of argumentation. In this study, we applied sentence shuffling to the true distribution of *consistency*, i.e., 5% of documents (See Table 1) with worse-quality revisions generated by the AEG.

6.1.2 Result

Table 5 shows the performance of the baseline metrics on the test set consisting of source and gold revisions (TETRA) and on the test set consisting of source and worse-quality revisions (worse only). We find that \mathbb{BERT} on the worse only was further improved by points, which indicates that the finetuned pre-trained language model can discriminate the quality of documents after revision. This also shows the reliability of IRC framework based on the binary classification of source documents and its gold revisions, which does not include explicit worse-quality revisions.

6.2 Do existing metrics not work?

A motivation of this study is based on the assumption that commonly used reference-based metrics in GEC cannot accurately evaluate document revisions. To verify this assumption, we evaluate gold revisions by human experts on TETRA using existing GEC's metrics and analyze whether the existing metrics does not work in document revisions.

6.2.1 Examined metrics

We use ERRANT (Bryant et al., 2017) and GLEU (Napoles et al., 2016a), which are widely used in GEC, as the evaluation metrics to be validated. The details of each are described below.

ERRANT It is an improved version of the previously standard metric, Max Match (M^2) Scorer (Dahlmeier and Ng, 2012). Similar to M^2 Scorer, ERRANT is performed based on the Max Match method, which identifies the maximum match using the edit lattice when matching the edits between systems and references, but the method of edit extraction differs from that of M^2 Scorer.

GLEU It is an improved version of BLEU (Papineni et al., 2002), the most *de facto* evaluation metric in machine translation, for GEC. GLEU is computed by subtracting the number of n-grams that appear in the input but not in the reference from the number of n-grams that match in the system output and reference. It is known to be more highly correlated with human judgment than M^2 Scorer (Napoles et al., 2016b).

6.2.2 Result

Table 6 shows the evaluation result. Note that since three gold revisions by human experts are assigned to TETRA, the values represent the average of the three. The evaluation results with ERRANT show that even human experts have a low value of 24.5 points, implying that it has issues in evaluating document revisions. ERRANT evaluates systems based on the extent to which the edit span suggested by systems matches the gold edit span included in references. However, in document revisions that require cross-sentence editing or more dynamic editing, ERRANT may have difficulty extracting accurate edit spans and matching them with references.

On the other hand, GLEU may seem to work as an evaluation metric since it succeeds in giving somewhat higher scores to human experts' revisions. However, GLEU also has issues, since its evaluation score for source documents, i.e., outputs that without any editing, are comparable to those of human experts. GLEU score is basically computed based on the n-gram agreement ratio in the three sentences (documents in this case): input, system output, and reference. In document revision, a task with low agreement rates §3.4), GLEU, which performs document-by-document matching, suggests that it tends to overestimate unedited output.

7 Conclusion

To go beyond *sentence-level* automated grammatical error correction to *document-level* revision, we proposed the new task of automated document revision and also provided the new corpus (TETRA) and the meta-evaluation framework (IRC), which allows to run transparent and interpretable analysis for better designing evaluation metrics. In addition, we explored reference-less and interpretable methods that can detect quality improvements by document revision. Our experimental results show that a finetuned pre-trained language model can discriminate the quality of documents after revision even when difference is subtle, indicating the feasibility of automated document revision. These research foundations and promising result will encourage the community to further study automated document revision models and metrics beyond sentence-level error corrections.

References

- Linda Allal, Lucile Chanquoy, and Pierre Largy. 2004. *Revision Cognitive and Instructional Processes.*, volume 8. Springer.
- Larry Beason. 1993. Feedback and revision in writing across the curriculum classes. *Research in the Teaching of English*, pages 395–422.
- Shane Bergsma, Matt Post, and David Yarowsky. 2012. Stylometric analysis of scientific articles. In Proceedings of the 2012 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pages 327–337, Montréal, Canada. Association for Computational Linguistics.
- Yevgeni Berzak, Jessica Kenney, Carolyn Spadine, Jing Xian Wang, Lucia Lam, Keiko Sophie Mori, Sebastian Garza, and Boris Katz. 2016. Universal Dependencies for learner English. In Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 737–746, Berlin, Germany. Association for Computational Linguistics.
- Eric Brill and Robert C. Moore. 2000. An improved error model for noisy channel spelling correction. In *Proceedings of the 38th Annual Meeting of the Association for Computational Linguistics*, pages 286– 293.
- Christopher Bryant, Mariano Felice, Øistein E. Andersen, and Ted Briscoe. 2019. The BEA-2019 shared task on grammatical error correction. In *Proceedings of the Fourteenth Workshop on Innovative Use of NLP for Building Educational Applications*, pages 52–75, Florence, Italy. Association for Computational Linguistics.
- Christopher Bryant, Mariano Felice, and Ted Briscoe. 2017. Automatic Annotation and Evaluation of Error Types for Grammatical Error Correction. In *Proceedings of the 55th Annual Meeting of the Asso-*

ciation for Computational Linguistics (ACL 2017), pages 793–805.

- Sabine Buchholz and Erwin Marsi. 2006. CoNLL-X shared task on multilingual dependency parsing. In Proceedings of the Tenth Conference on Computational Natural Language Learning (CoNLL-X), pages 149–164, New York City. Association for Computational Linguistics.
- M. Buchman, R. Moore, L. Stern, and B. Feist. 2000. *Power Writing: Writing with Purpose*. No. 4. Pearson Education Canada.
- Jill Burstein, Daniel Marcu, and Kevin Knight. 2003. Finding the write stuff: Automatic identification of discourse structure in student essays. *IEEE Intelligent Systems*, 18(1):32–39.
- Aoife Cahill, Nitin Madnani, Joel Tetreault, and Diane Napolitano. 2013. Robust systems for preposition error correction using Wikipedia revisions. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 507–517.
- Martin Chodorow, Joel Tetreault, and Na-Rae Han. 2007. Detection of grammatical errors involving prepositions. In *Proceedings of the Fourth ACL-SIGSEM Workshop on Prepositions*, pages 25–30.
- Shamil Chollampatt and Hwee Tou Ng. 2018. A Multilayer Convolutional Encoder-Decoder Neural Network for Grammatical Error Correction. In *Proceedings of the 32nd AAAI Conference on Artificial Intelligence (AAAI 2018)*, pages 5755–5762.
- Leshem Choshen and Omri Abend. 2018. Referenceless measure of faithfulness for grammatical error correction. In Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers), pages 124– 129, New Orleans, Louisiana. Association for Computational Linguistics.
- Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. 2017. Deep reinforcement learning from human preferences. In *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc.
- Daniel Dahlmeier and Hwee Tou Ng. 2012. Better Evaluation for Grammatical Error Correction. In Proceedings of the 2012 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL 2012), pages 568–572.
- Robert Dale, Ilya Anisimoff, and George Narroway. 2012. Hoo 2012: A report on the preposition and determiner error correction shared task. In *Proceedings of the Seventh Workshop on Building Educational Applications Using NLP*, pages 54–62. Association for Computational Linguistics.

- Robert Dale and Adam Kilgarriff. 2011. Helping our own: The hoo 2011 pilot shared task. In *Proceedings of the Generation Challenges Session at the 13th European Workshop on Natural Language Generation*, pages 242–249. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers), pages 4171–4186. Association for Computational Linguistics.
- Lester Faigley and Stephen Witte. 1981. Analyzing revision. *College composition and communication*, 32(4):400–414.
- Mariano Felice and Ted Briscoe. 2015. Towards a standard evaluation method for grammatical error detection and correction. In *Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NACL-HLT 2015)*, pages 578– 587.
- Rachele De Felice and Stephen G. Pulman. 2008. A Classifier-Based Approach to Preposition and Determiner Error Correction in L2 English. In *COLING*, pages 169–176.
- Simon Flachs, Ophélie Lacroix, Helen Yannakoudakis, Marek Rei, and Anders Søgaard. 2020. Grammatical error correction in low error density domains: A new benchmark and analyses. In *Proceedings of the* 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), pages 8467–8478.
- Linda Flower and John R Hayes. 1981. A cognitive process theory of writing. *College composition and communication*, 32(4):365–387.
- Tao Ge, Furu Wei, and Ming Zhou. 2018. Reaching Human-level Performance in Automatic Grammatical Error Correction: An Empirical Study. *arXiv preprint arXiv:1807.01270*.
- Takumi Gotou, Ryo Nagata, Masato Mita, and Kazuaki Hanawa. 2020. Taking the correction difficulty into account in grammatical error correction evaluation. In Proceedings of the 28th International Conference on Computational Linguistics, pages 2085–2095.
- Francisco Guzmán, Shafiq Joty, Lluís Màrquez, and Preslav Nakov. 2015. Pairwise neural machine translation evaluation. In Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), pages 805–814. Association for Computational Linguistics.

- Na-Rae Han, Martin Chodorow, and Claudia Leacock. 2006. Detecting Errors in English Article Usage by Non-Native Speakers. *Natural Language Engineering*, 12(2):115–129.
- Kazuaki Hanawa, Ryo Nagata, and Kentaro Inui. 2021. Exploring methods for generating feedback comments for writing learning. In Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, pages 9719–9730, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Aminul Islam and Diana Inkpen. 2009. Real-word spelling correction using Google Web 1T 3-grams. In Proceedings of the 2009 Conference on Empirical Methods in Natural Language Processing, pages 1241–1249.
- Md Asadul Islam and Enrico Magnani. 2021. Is this the end of the gold standard? a straightforward reference-less grammatical error correction metric. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 3009–3015, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Jianshu Ji, Qinlong Wang, Kristina Toutanova, Yongen Gong, Steven Truong, and Jianfeng Gao. 2017. A Nested Attention Neural Hybrid Model for Grammatical Error Correction. In Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (ACL 2017), pages 753–762.
- Masahiro Kaneko, Masato Mita, Shun Kiyono, Jun Suzuki, and Kentaro Inui. 2020. Encoder-decoder models can benefit from pre-trained masked language models in grammatical error correction. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics (ACL 2020)*, pages 4248–4254.
- Jungo Kasai, Keisuke Sakaguchi, Ronan Le Bras, Lavinia Dunagan, Jacob Morrison, Alexander R. Fabbri, Yejin Choi, and Noah A. Smith. 2021a. Bidimensional leaderboards: Generate and evaluate language hand in hand. arXiv https://arxiv.org/ abs/2112.04139.
- Jungo Kasai, Keisuke Sakaguchi, Lavinia Dunagan, Jacob Morrison, Ronan Le Bras, Yejin Choi, and Noah A. Smith. 2021b. Transparent human evaluation for image captioning. *arXiv* https://arxiv. org/abs/2111.08940.
- Omid Kashefi, Tazin Afrin, Meghan Dale, Christopher Olshefski, Amanda Godley, Diane Litman, and Rebecca Hwa. 2022. Argrewrite v. 2: an annotated argumentative revisions corpus. *Language Resources and Evaluation*, pages 1–35.
- Diederik Kingma and Jimmy Ba. 2015. Adam: A Method for Stochastic Optimization. In Proceedings of the 3rd International Conference on Learning Representations (ICLR 2015).

- Shun Kiyono, Jun Suzuki, Masato Mita, Tomoya Mizumoto, and Kentaro Inui. 2019. An empirical study of incorporating pseudo data into grammatical error correction. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP* 2019), pages 1236–1242.
- Charles W. Kneupper. 1978. Teaching argument: An introduction to the toulmin model. *College Composition and Communication*, 29(3):237–241.
- Aomi Koyama, Kengo Hotate, Masahiro Kaneko, and Mamoru Komachi. 2021. Comparison of grammatical error correction using back-translation models. In Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Student Research Workshop, pages 126–135.
- Claudia Leacock, Martin Chodorow, Michael Gamon, and Joel Tetreault. 2014. Automated grammatical error detection for language learners. *Synthesis lectures on human language technologies*, 7(1):1–170.
- John Lee and Stephanie Seneff. 2008. Correcting misuse of verb forms. In *Proceedings of ACL-08: HLT*, pages 174–182.
- John Lee and Jonathan Webster. 2012. A corpus of textual revisions in second language writing. In Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers), pages 248–252, Jeju Island, Korea. Association for Computational Linguistics.
- Masato Mita, Tomoya Mizumoto, Masahiro Kaneko, Ryo Nagata, and Kentaro Inui. 2019. Cross-corpora evaluation and analysis of grammatical error correction models — is single-corpus evaluation enough? In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers), pages 1309–1314, Minneapolis, Minnesota. Association for Computational Linguistics.
- Ryo Nagata. 2019. Toward a task of feedback comment generation for writing learning. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pages 3206–3215, Hong Kong, China. Association for Computational Linguistics.
- Ryo Nagata, Masato Hagiwara, Kazuaki Hanawa, Masato Mita, Artem Chernodub, and Olena Nahorna. 2021. Shared task on feedback comment generation for language learners. In *Proceedings of the 14th International Conference on Natural Language Generation*, pages 320–324, Aberdeen, Scotland, UK. Association for Computational Linguistics.

- Ryo Nagata, Atsuo Kawai, Koichiro Morihiro, and Naoki Isu. 2006. A Feedback-Augmented Method for Detecting Errors in the Writing of Learners of English. In *COLING-ACL*, pages 241–248.
- Ryo Nagata, Mikko Vilenius, and Edward Whittaker. 2014. Correcting preposition errors in learner English using error case frames and feedback messages. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 754–764.
- Courtney Napoles, Maria Nădejde, and Joel Tetreault. 2019. Enabling robust grammatical error correction in new domains: Data sets, metrics, and analyses. *Transactions of the Association for Computational Linguistics*, pages 551–566.
- Courtney Napoles, Keisuke Sakaguchi, Matt Post, and Joel Tetreault. 2015. Ground Truth for Grammatical Error Correction Metrics. In Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (ACL-IJCNLP 2015), pages 588–593.
- Courtney Napoles, Keisuke Sakaguchi, Matt Post, and Joel Tetreault. 2016a. GLEU Without Tuning. *arXiv* preprint arXiv:1605.02592.
- Courtney Napoles, Keisuke Sakaguchi, and Joel Tetreault. 2016b. There's no comparison: Reference-less evaluation metrics in grammatical error correction. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2109–2115. Association for Computational Linguistics.
- Courtney Napoles, Keisuke Sakaguchi, and Joel Tetreault. 2017. JFLEG: A Fluency Corpus and Benchmark for Grammatical Error Correction. In Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics (EACL 2017), pages 229–234.
- Hwee Tou Ng, Siew Mei Wu, Ted Briscoe, Christian Hadiwinoto, Raymond Hendy Susanto, and Christopher Bryant. 2014. The CoNLL-2014 Shared Task on Grammatical Error Correction. In *Proceedings of the 18th Conference on Computational Natural Language Learning (CoNLL 2014): Shared Task*, pages 1–14.
- Hwee Tou Ng, Siew Mei Wu, Yuanbin Wu, Christian Hadiwinoto, and Joel Tetreault. 2013. The CoNLL-2013 Shared Task on Grammatical Error Correction. In Proceedings of the 17th Conference on Computational Natural Language Learning (CoNLL 2013): Shared Task, pages 1–12.
- Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. 2019. fairseq: A Fast, Extensible Toolkit for Sequence Modeling. In *Proceedings of*

the 2019 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL 2019).

- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. BLEU: A Method for Automatic Evaluation of Machine Translation. In *Proceedings* of 40th Annual Meeting of the Association for Computational Linguistics, pages 311–318.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners. *OpenAI Blog*.
- Sascha Rothe, Jonathan Mallinson, Eric Malmi, Sebastian Krause, and Aliaksei Severyn. 2021. A simple recipe for multilingual grammatical error correction. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 2: Short Papers), pages 702–707.
- Alla Rozovskaya and Dan Roth. 2014. Building a state-of-the-art grammatical error correction system. *Transactions of the Association for Computational Linguistics*, 2:419–434.
- Keisuke Sakaguchi, Courtney Napoles, Matt Post, and Joel Tetreault. 2016. Reassessing the goals of grammatical error correction: Fluency instead of grammaticality. *Transactions of the Association for Computational Linguistics*, 4:169–182.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. Neural Machine Translation of Rare Words with Subword Units. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (ACL 2016)*, pages 1715–1725.
- Anthony Seow. 2002. *The Writing Process and Process Writing*, page 315–320. Cambridge University Press.
- Toshikazu Tajiri, Mamoru Komachi, and Yuji Matsumoto. 2012. Tense and Aspect Error Correction for ESL Learners Using Global Context. In *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics (ACL 2012)*, pages 198–202.
- Joel Tetreault, Jennifer Foster, and Martin Chodorow. 2010. Using parse features for preposition selection and error detection. In *Proceedings of the ACL 2010 Conference Short Papers*, pages 353–358.
- Joel R. Tetreault and Martin Chodorow. 2008. The ups and downs of preposition error detection in ESL writing. In *Proceedings of the 22nd International Conference on Computational Linguistics (Coling* 2008), pages 865–872.
- Kristina Toutanova and Robert Moore. 2002. Pronunciation modeling for improved spelling correction. In

Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics, pages 144–151.

- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention Is All You Need. In Advances in Neural Information Processing Systems 31 (NIPS 2017), pages 5998–6008.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. 2020. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45. Association for Computational Linguistics.
- Ziang Xie, Guillaume Genthial, Andrew Y. Ng, and Dan Jurafsky. 2018. Noising and Denoising Natural Language: Diverse Backtranslation for Grammar Correction. In *NAACL*, pages 619–628.
- Helen Yannakoudakis, Ted Briscoe, and Ben Medlock. 2011. A New Dataset and Method for Automatically Grading ESOL Texts. In *ACL*, pages 180–189.
- Zheng Yuan and Ted Briscoe. 2016. Grammatical error correction using neural machine translation. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 380–386.
- Zheng Yuan and Christopher Bryant. 2021. Documentlevel grammatical error correction. In *Proceedings* of the 16th Workshop on Innovative Use of NLP for Building Educational Applications, pages 75–84, Online. Association for Computational Linguistics.
- Fan Zhang, Homa B. Hashemi, Rebecca Hwa, and Diane Litman. 2017. A corpus of annotated revisions for studying argumentative writing. In Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 1568–1578. Association for Computational Linguistics.
- Fan Zhang, Rebecca Hwa, Diane Litman, and Homa B. Hashemi. 2016. ArgRewrite: A web-based revision assistant for argumentative writings. In *Proceedings* of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Demonstrations, pages 37–41, San Diego, California. Association for Computational Linguistics.
- Fan Zhang and Diane Litman. 2014. Sentence-level rewriting detection. In Proceedings of the Ninth Workshop on Innovative Use of NLP for Building Educational Applications, pages 149–154, Baltimore,

Maryland. Association for Computational Linguistics.

Fan Zhang and Diane Litman. 2015. Annotation and classification of argumentative writing revisions. In Proceedings of the Tenth Workshop on Innovative Use of NLP for Building Educational Applications, pages 133–143, Denver, Colorado. Association for Computational Linguistics.

A Example of XML annotation

B Aspect distribution

C Hyper-parameters settings

D Experimental settings for AEG

We adopted the "Transformer (big)" settings (Vaswani et al., 2017) using the implementation in the fairseq toolkit (Ott et al., 2019) as a revise GEC model. In addition, we used the BEA-2019 workshop official dataset (Bryant et al., 2019) as the training and validation data. For preprocessing, we tokenized the training data using the spaCy tokenizer⁷. Then, we removed sentence pairs where both sentences where identical or both longer than 80 tokens. Finally, we acquired subwords from the target sentence via the byte-pair-encoding (BPE) (Sennrich et al., 2016) algorithm. We used the subword-nmt implementation⁸ and then applied BPE to splitting both source and target texts. The number of merge operations was set to 8,000.

⁷https://spacy.io/

⁸https://github.com/rsennrich/subword-nmt

```
1 <doc id="Pxx-xxxx" editor="A" format="Conference" position="Non-student" region="Native">
2 <abstract>
3 <text>In this paper, (...) extracted sense inventory. The</text>
4 <edit type="conciseness" crr="induction and disambiguation steps" comments="conciseness - just</pre>
      tightening it up a little bit.">induction step and the disambiguation step</edit>
5 <text>are based on the same principle: (...) topical dimensions</text>
7 <text>a similar vein, ...</text>
8 . . .
9 </abstract>
10 <introduction>
11 <text>Word sense induction (...)</text>
12 <text>\n\n Word sense disambiguation (...)</text>
13 <edit type="punctuation" crr="" comments="punctuation - comma is not appropriate.">,</edit>
14 . . .
15 </introduction>
```

	Stu	dent	Non	-student	Na	ative	Non	-native	Co	onf.	V	VS
Aspects	#	%	#	%	#	%	#	%	#	%	#	%
Grammaticality	79	19.5	106	21.5	60	16.5	125	21.3	110	22.7	75	16.2
Fluency	115	25.2	110	22.4	74	20.4	151	25.8	99	20.4	126	27
Clarity	100	21.9	84	17.1	88	24.2	96	16.4	84	17.3	100	21.6
Style	39	8.5	37	7.5	29	8.0	47	8.0	46	9.5	30	6.5
Readability	74	16.2	85	17.3	75	20.7	84	14.3	92	19.0	67	14.4
Redundancy	32	7.0	36	7.3	22	6.1	46	7.8	25	5.2	43	9.3
Consistency	18	3.9	34	6.9	15	4.1	37	6.3	29	6.0	23	5.0

Table 7: Example of XML annotation. For brevity, we omitted a part of the text with "...".

Table 8: Distributions of revision aspects by writer's attributes.

Configurations	Values
Model Architecture	bert-base-uncased
Optimizer	Adam (Kingma and Ba,
	2015)
Learning Rate	2e-5
Number of Epochs	10
Batch Size	32

Table 9: Hyper-parameters settings